




ACC-2027

Diamond Plate Floor Cover

Club Car Precedent

Installation Instructions

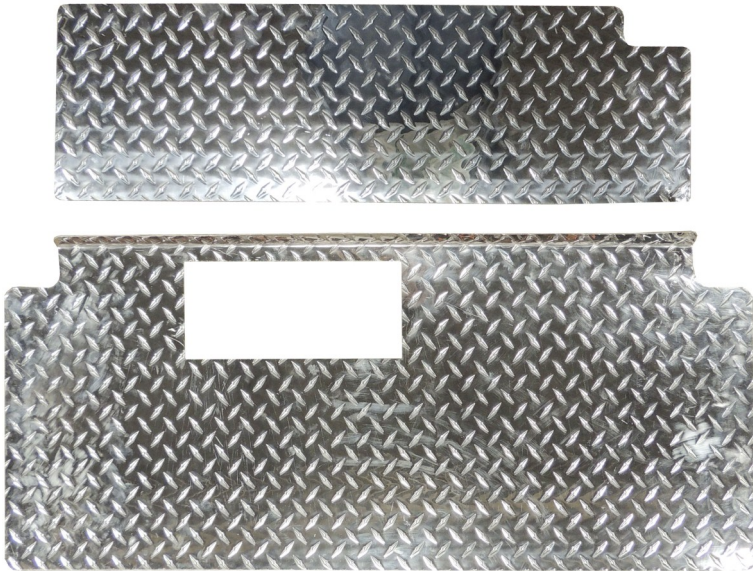

Contents of ACC-2027 Diamond Plate Floor Cover:

- a (1 ea.) Upper Floor Cover (top of photo)
- b (1 ea.) Lower Floor Cover (bottom of photo)
- c (2 ea.) #10 x 1.5" Self Tapping Screws
- d (4 ea.) #10 x 1.0" Self Tapping Screws

Caution: Please read through the instructions carefully. Look behind each drill location BEFORE YOU DRILL. Installer is responsible for damage (i.e. drilling into a wiring harness, battery, fuel tank etc.).

Installation Preparation

1. Remove existing Floor Cover by lifting it from the sides of the cart and over the pedals.


Note: The existing Floor Cover may or may not be attached under the Rocker Panels or Sill Plates. If it is attached, remove and retain all hardware so the Floor Cover can be removed.



2. Clear any debris from the flooring.

Diamond Plate Floor Board Installation

1. Identify the Lower Floor Cover. Bring the Lower Floor Cover over the pedals and lower so the pedals go through the cut-out. Place on the floor of the cart.

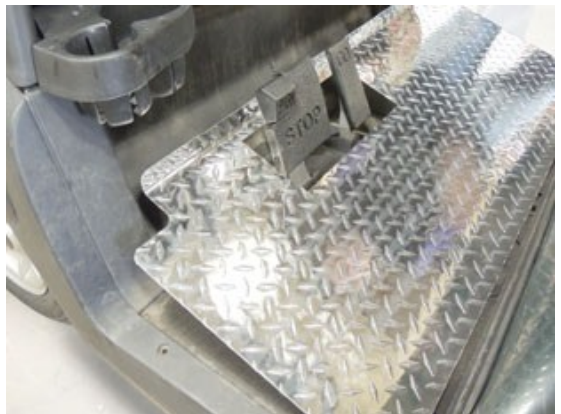

2. Identify the Upper Floor Cover. Align the Upper Floor Cover so the notch is in the upper right corner. Slide the Upper Floor Cover from the passenger's side behind the pedals towards the driver's side.

Note: You will have to lift the Cup Holders to make room for the Upper Floor Cover to rest behind them.



3. Make sure both Covers are aligned properly.
4. Use (2) #10 x 1.0" Self Tapping Screws to fasten the Upper Floor Cover at the top two corners.
5. Use (2) #10 x 1.0" Self Tapping Screws to fasten the Lower Floor Cover at the two corners closest to the seat.
6. Use (2) #10 x 1.5" Self Tapping Screws to fasten the middle seam between the Upper and Lower Floor Covers. Space screws evenly.
7. Reinstall any items that needed to be removed in the Note in Step 1.

This completes the installation of your Precedent Diamond Plate Floor Cover. Please enjoy safely!

