




ACC-RR04

Roof Rack

E-Z-Go RXV

## Installation Instructions

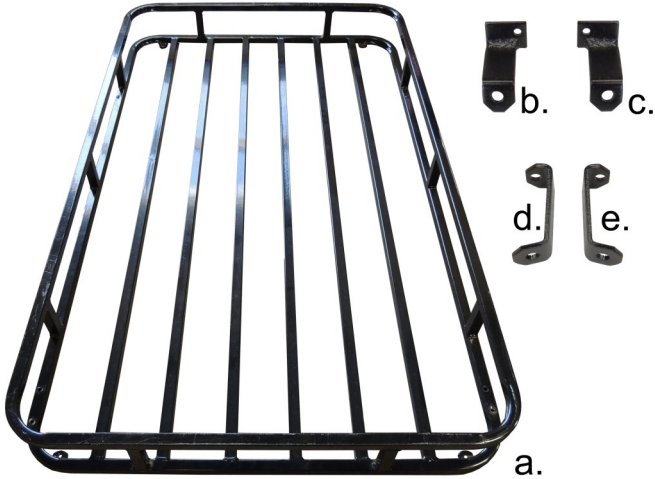

Contents of ACC-RR04 E-Z-Go RXV Roof Rack:

- a (1 ea.) Roof Rack
- b (1 ea.) Driver Front Mounting Brackets
- c (1 ea.) Passenger Front Mounting Bracket
- d (1 ea.) Driver Rear Mounting Bracket
- e (1 ea.) Passenger Rear Mounting Bracket
- f (2 ea.) M6 x 25mm Hex Bolts
- g (2 ea.) M6 x 40mm Hex Bolts
- h (8 ea.) M6 Flat Washers
- i (4 ea.) M6 Lock Nuts
- j (4 ea.) M10 x 60mm Hex Bolts
- k (8 ea.) M10 Flat Washers
- l (4 ea.) M10 Lock Nuts


**Caution:** Please read through the instructions carefully. Look behind each drill location BEFORE YOU DRILL. Installer is responsible for damage (i.e. drilling into a wiring harness, battery, fuel tank etc.).

## Install Front Mounting Brackets

1. On the Front Top Strut, remove the (2) bolts, washers and nuts from the holes connecting it to the Top.




2. Identify the Passenger Front Mounting Bracket. Position the Bracket on the Top as shown in the photo to the right.
3. Using (1) M10 x 60mm Hex Bolt, (2) M10 Flat Washers and (1) M10 Lock Nut, fasten the Mounting Bracket to the Top and through the Top Strut. Do NOT fully tighten.
4. Repeat Steps 2 and 3 for the Driver Front Mounting Bracket.

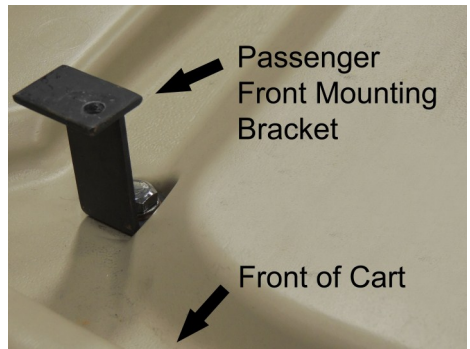


## Install Rear Mounting Brackets

1. On the Rear Top Struts, remove the bolts, washers and nuts from the hole closest to the bend in the Struts.

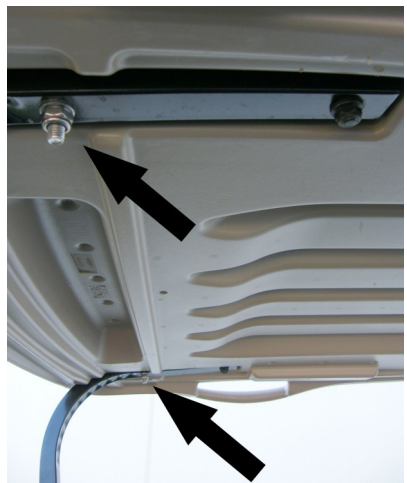

2. Identify the Rear Mounting Brackets. Position (1) Bracket on the Top as shown in the photo to the right.
3. Using (1) M10 x 60mm Hex Bolt, (2) M10 Flat Washers and (1) M10 Lock Nut, fasten the Mounting Bracket to the Top and through the Top Strut. Do NOT fully tighten.
4. Repeat Steps 2 and 3 for the Passenger Rear Mounting Bracket.

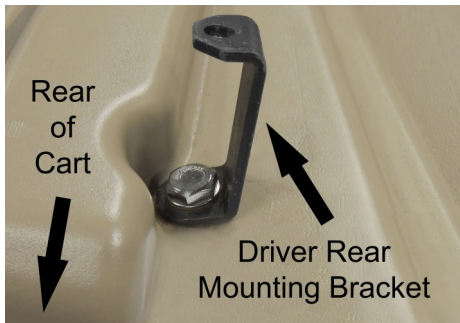

**Note:** Silicone can be used to seal the (4) holes that go through the Top.

### Roof Rack Alignment

1. Align the Roof Rack on top of the Mounting Brackets. The Front Mounting Brackets will line up with the tabs on the front of the Roof Rack. The square tubing of the Roof Rack will rest on the Rear Mounting Brackets.
2. Once the Brackets are aligned, mark the hole locations on the underside of the square tubing of the Roof Rack for the Rear Mounting Bracket holes.
3. Lower The Roof Rack to a safe, flat location and place it on a piece of cardboard to prevent from scratching the finish. Using a 1/4" drill bit, drill (2) holes through the square tubing at the marked locations.



### Roof Rack Installation

1. Lift the Roof Rack on top of Mounting Brackets and align the mounting holes.
2. Attach the Roof Rack to the Front Mounting Brackets using (2) M6 x 25mm Hex Bolts, (4) M6 Flat Washers and (2) M6 Lock Nuts.
3. Attach the Roof Rack to the Rear Mounting Brackets using (2) M6 x 40mm Hex Bolts, (4) M6 Flat Washers and (2) M6 Lock Nuts.
4. Tighten the bolts in a diagonal pattern (i.e. Driver Front then Passenger Rear; Driver Rear then Passenger Front).

### Complete Installation

1. Fully tighten all remaining bolts.

This completes the installation of your RXV Roof Rack. Please enjoy safely!

